

# BioMidi 625



Biostorage you can depend on



The **BioMidi 625** cabinet is designed to meet your biomaterial refrigeration and freezer requirements, with very few limitations.



The specifications include the Gram MPC control unit which has been specially developed for users of BioLine storage cabinets. Decades of experience blended with the best of modern technologies provide a uniquely capable control unit, making the BioMidi range the ideal choice where maintaining stable temperatures is decisive in a purchasing decision.

The **BioMidi 625** utilises environmentally responsible HFC-free foam propellants and is available with HFC-free refrigerants.

The functional design ensures easy, ergonomically correct access to the storage space.

BioMidi 625.  
Drawers and glass door are optional extras.



 II 3G Ex nA nC nL IIB T5 Gc (RR)  
 II 3G Ex nA nC nL IIB T2 Gc (RF)  
TÜV 08 ATEX 354664 X

The BioMidi 625 is available as a refrigerator or freezer in either white, aluminium or stainless steel finish. All BioMidi models come with selfclosing door. Glassdoor is available for refrigerator.

Version 03. Valid from 15.10.20

Biostorage  
you can  
depend on



# BioMidi 625



Biostorage you can depend on

## Top panel with BioLine control unit

The MPC unit is specially developed for users of BioLine storage cabinets. Among its many features are acoustic temperature and door alarms, and a voltage-free contact (NO/NC) for remote alarms. The display can be easily locked.



## Access port

24.5 mm port for ease of access, e.g. sensors for external temperature surveillance.



## E-sensor

Extra sensor for providing a temperature reference within the storage compartment.



## Shelves and drawers

A wide range of versatile interior fittings and layouts is available. The operating specifications and the interior layout can both be customised.




## Aluminium / stainless steel interior

The interior base, including shelf or drawer brackets and support rails are made of stainless steel.



## ATEX

All BioMidi models comply with ATEX Cat.3 Zone 2 requirements, both internal and externally, allowing for placement in locations where explosive gas atmospheres may be present.

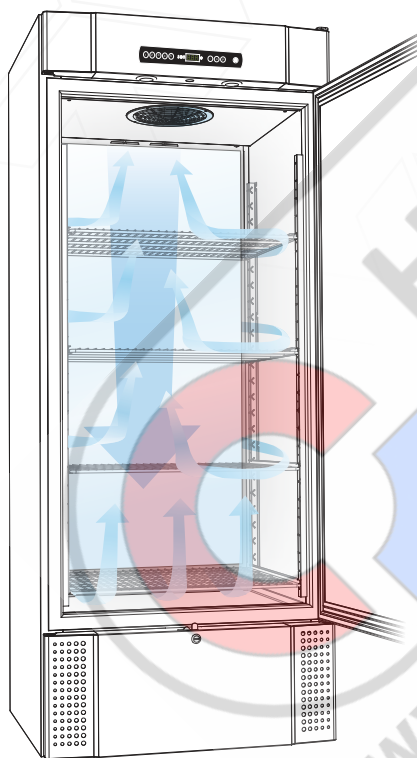

## AIR DISTRIBUTION

The unique Gram BioLine air distribution system makes sure the temperature inside the cabinet remains stable at all times, while using the minimum amount of energy

Technical specifications	BioMidi RR625	BioMidi RF625
Temperature range	+20/+2 °C	-5/-25 °C
Ambient temperature range	solid door +10/+43 °C; glass door (RR) +10/+38 °C	
Control Unit	Gram Control Unit with voltage-free contact, E-sensor, acoustic and visual door and temperature alarms that can be programmed individually, alarm recording and offset function	
Material interior	Aluminium/stainless steel or stainless steel	
Material exterior	White lacquered steel or aluminium/stainless steel or stainless steel	
Dimensions mm (W x D x H)	815 x 731 x 1980/2000	
Gross volume	625 litres/22.1 cubic feet	
Net volume	451 litres/15.9 cubic feet	
Net weight	Unpacked net weight without optional fittings: 152 kg	
Modules for shelves and drawers	Shelves 25 - Drawers 12	
Insulation	60 mm polyurethane with HFC-free cyclopentane propellant	
K-Value	Glass door 0.4912 W/m <sup>2</sup> K	Solid door 0.3122 W/m <sup>2</sup> K
Refrigerant	R290 / R134a /prepared for external compressor	R290 / R404A**/prepared for external compressor
CO <sub>2</sub> e	R134a: 329	R404A: 941
Refrigeration capacity at -10 °C	R290 389 Watt / R134a 314 Watt	-
Refrigeration capacity at -25 °C	-	R290 512 watt; **R404A 568 watt
Energy consumption	1.30 kWh/24h	4.03 kWh/24h
Sound level	46.6 dB(A)	48.4 dB(A)
Base	Recessed wheels*	
Connection	230 V, 50 Hz	
Air system	Gram BioLine ventilated air distribution system	
Defrost system	Automatic smart defrost with re-evaporation of defrost water	

\* The cabinet can also be delivered for mounting on a plinth at no extra charge.

\*\* R404A Available outside European Union





**LABORATORY EQUIPMENT MAINTENANCE, REPAIR, CALIBRATION AND SALES**

Established in 1987, Henderson Biomedical is the UK's leading laboratory equipment sales and service provider. Our knowledgeable team can provide you with excellent sales advice on a range of different types of laboratory equipment including centrifuges, refrigerators, freezers and heat sealers.

Henderson Biomedical is also able to provide you with first class after-sales service and calibration of your laboratory equipment. We are an **ISO 17025 (UKAS) accredited calibration test laboratory** and our team of Field Service Engineers cover the whole of the United Kingdom.

Please contact us for more information on the types of equipment we supply and the different after-sales services we can offer.

**Henderson Biomedical**

Unit 3, Swan Close  
Croydon CR0 2DZ  
United Kingdom

**Tel: 020 8663 4610**

For sales enquiries: [sales@henderson-biomedical.co.uk](mailto:sales@henderson-biomedical.co.uk)  
For all other enquiries: [info@henderson-biomedical.co.uk](mailto:info@henderson-biomedical.co.uk)  
[www.henderson-biomedical.co.uk](http://www.henderson-biomedical.co.uk)

